

Product Change Notice (PCN)

Date: **09/08/2023**

PCN Number: **PCN-0451547R-01**



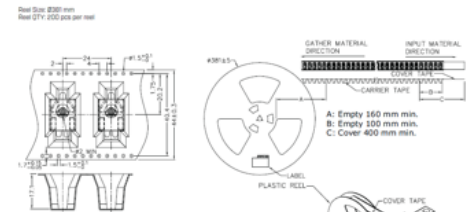
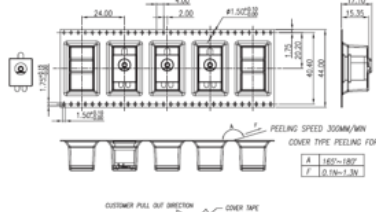
To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: **PJ-015AH-SMT-TR**

Reason(s) for Change: **Manufacturing Improvement processes**

Description of Change: **Packaging and Material change. See image Below**

PREVIOUS CUI DEVICES DETAIL / IMAGE			NEW CUI DEVICES DETAIL / IMAGE																																												
<table border="1"> <thead> <tr> <th></th> <th>MATERIAL</th> <th>PLATING</th> </tr> </thead> <tbody> <tr> <td>center pin</td> <td>copper</td> <td>nickel</td> </tr> <tr> <td>terminal 1</td> <td>brass</td> <td>silver</td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>silver</td> </tr> <tr> <td>terminal 3</td> <td>brass</td> <td>silver</td> </tr> <tr> <td>plastic</td> <td>PAST or equivalent</td> <td></td> </tr> </tbody> </table>		MATERIAL	PLATING	center pin	copper	nickel	terminal 1	brass	silver	terminal 2	copper alloy	silver	terminal 3	brass	silver	plastic	PAST or equivalent				<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> </tr> </thead> <tbody> <tr> <td>center pin</td> <td>brass</td> <td>nickel</td> </tr> <tr> <td>terminal 1</td> <td>brass</td> <td>silver</td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>silver</td> </tr> <tr> <td>terminal 3</td> <td>brass</td> <td>silver</td> </tr> <tr> <td>housing</td> <td>PA10T UL94V-0</td> <td>black</td> </tr> </tbody> </table>	DESCRIPTION	MATERIAL	PLATING/COLOR	center pin	brass	nickel	terminal 1	brass	silver	terminal 2	copper alloy	silver	terminal 3	brass	silver	housing	PA10T UL94V-0	black								
	MATERIAL	PLATING																																													
center pin	copper	nickel																																													
terminal 1	brass	silver																																													
terminal 2	copper alloy	silver																																													
terminal 3	brass	silver																																													
plastic	PAST or equivalent																																														
DESCRIPTION	MATERIAL	PLATING/COLOR																																													
center pin	brass	nickel																																													
terminal 1	brass	silver																																													
terminal 2	copper alloy	silver																																													
terminal 3	brass	silver																																													
housing	PA10T UL94V-0	black																																													
<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>reel storage</td> <td>at relative humidity <80%</td> <td></td> <td>40</td> <td></td> <td>°C</td> </tr> <tr> <td>reflow soldering</td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td>265</td> <td>°C</td> </tr> <tr> <td>drying conditions*</td> <td>parts in reel: bake at 40°C ±0.5°C for 72 hours parts removed from reel: bake at 40°C ±0.5°C for 10 hours</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Notes: 1. Must reflow solder within 72 hours from leaving vacuum packaging at a temperature <30°C & relative humidity <80%. 2. After unspooling from 1000 ft.</p> 	parameter	conditions/description	min	typ	max	units	reel storage	at relative humidity <80%		40		°C	reflow soldering	see reflow profile	255	260	265	°C	drying conditions*	parts in reel: bake at 40°C ±0.5°C for 72 hours parts removed from reel: bake at 40°C ±0.5°C for 10 hours							<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>reel storage</td> <td><30°C, 25-80% humidity reel opened: use within 1 month reel unopened: use within 6 months</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>reflow soldering</td> <td>see reflow profile</td> <td>260</td> <td>265</td> <td>270</td> <td>°C</td> </tr> </tbody> </table> <p>Notes: 1. CUI Devices recommends usage of the product within 2 hours after TSM is opened. After 6 hours, CUI Devices recommends drying the parts prior to use.</p> 	parameter	conditions/description	min	typ	max	units	reel storage	<30°C, 25-80% humidity reel opened: use within 1 month reel unopened: use within 6 months					reflow soldering	see reflow profile	260	265	270	°C		
parameter	conditions/description	min	typ	max	units																																										
reel storage	at relative humidity <80%		40		°C																																										
reflow soldering	see reflow profile	255	260	265	°C																																										
drying conditions*	parts in reel: bake at 40°C ±0.5°C for 72 hours parts removed from reel: bake at 40°C ±0.5°C for 10 hours																																														
parameter	conditions/description	min	typ	max	units																																										
reel storage	<30°C, 25-80% humidity reel opened: use within 1 month reel unopened: use within 6 months																																														
reflow soldering	see reflow profile	260	265	270	°C																																										
																																															

F-723-001

Revision: A



Affected Date Code: **09/07/2023**

Product Availability: *Pertaining to market availability*

PCN Approval:

Operations/Quality

A handwritten signature in black ink, appearing to read "Rae Adams", is written over a horizontal line.

Product Management

A handwritten signature in black ink, appearing to read "J. Adams", is written over a horizontal line.