

Product Change Notice (PCN)

Date: 06/30/2023

PCN Number: PCN-0450772R-01


To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: PJ-009A

Reason(s) for Change: Tooling and Material Change

Description of Change: Slight Dimensional difference. Terminal Material Change See image Below

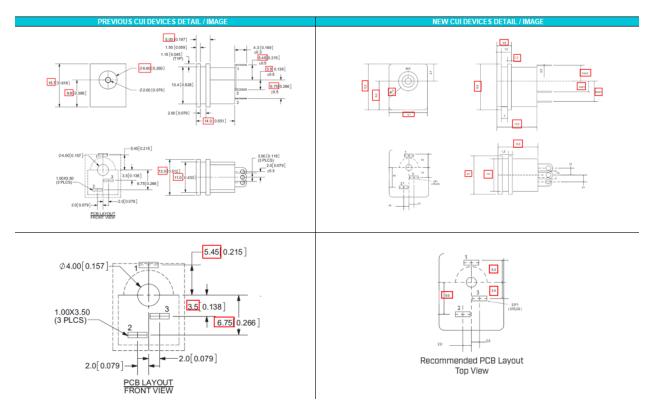

F-723-001



PREVIOUS CUI DEVICES DETAIL / IMAGE

| | MATERIAL | PLATING | |
|------------|--------------|---------|--|
| center pin | copper | nickel | |
| terminal 1 | brass | tin | |
| terminal 2 | copper alloy | tin | |
| terminal 3 | brass | tin | |
| plastic | PBT | | |

| DESCRIPTION | MATERIAL | PLATING/COLOR |
|-------------|---------------|---------------|
| center pin | brass | nickel |
| terminal 1 | brass | tin |
| terminal 2 | copper alloy | tin |
| terminal 3 | brass | tin |
| housing | PBT (UL94V-0) | black |
| | | |

NEW CUI DEVICES DETAIL / IMAG

PREVIOUS CUI DEVICES DETAIL / IMAG

| parameter | conditions/description | min | typ | max | units |
|---------------------------------|--|-----|-------|----------|----------|
| rated input voltage | | | 24 | | Vdc |
| rated input current | | | | 2.5 | A |
| contact resistance ¹ | between terminal and mating plug between terminal in a closed circuit | | | 50 30 | mΩ mΩ |
| insulation resistance | at 500 Vdc | 100 | | | MΩ |
| voltage withstand | at 50/60Hz for 1 minute | | | 500 | Vac |
| nsertion/withdrawal force | | 0.3 | | 3 | kg |
| terminal strength | any direction for 10 seconds | | | 500 | Q |
| operating temperature | | -25 | | 85 | °C |
| life | | | 5,000 | | cycles |
| flammability rating | UL94V-0 | | | | |
| RoHS | VBS | | | | |

| parameter | conditions/description | min | typ | max | units |
|----------------------------|--|-----|-------|----------|----------|
| rated input voltage | | | 24 | | Vdc |
| rated input current | | | | 2.5 | A |
| contact resistance | between terminal and mating plug between terminal in a closed circuit | | | 50 30 | Ωm Ωm |
| insulation resistance | at 500 Vdc | 100 | | | MΩ |
| voltage withstand | for 1 minute | | | 500 | Vac |
| insertion/withdrawal force | | 0.5 | | 2 | kg |
| operating temperature | | -25 | | 85 | °C |
| life | | | 5,000 | | cycles |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |
| | | | | | |

Affected Date Code: 06/30/2023

Product Availability: Pertaining to market availability

PCN Approval:

Operations/Quality

Talp

Product Management

Revision: A