

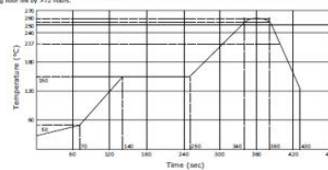
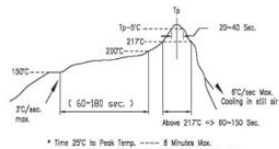


PREVIOUS CUI DEVICES DETAIL / IMAGE			NEW CUI DEVICES DETAIL / IMAGE		
	MATERIAL	PLATING	DESCRIPTION	MATERIAL	PLATING/COLOR
terminal 1	copper alloy	silver	terminal 1	brass	silver
terminal 2	copper alloy	silver	terminal 2	brass	silver
terminal 3	copper alloy	silver	terminal 3	brass	silver
terminal 4	copper alloy	silver	terminal 4	brass	silver
terminal 10	brass	silver	terminal 10	brass	silver
plastic	PA10T		housing	PA10T (UL94V-0)	black

PREVIOUS CUI DEVICES DETAIL / IMAGE			NEW CUI DEVICES DETAIL / IMAGE																																																		
SOLDERABILITY <table border="1"> <thead> <tr> <th>parameter</th><th>conditions/description</th><th>min</th><th>typ</th><th>max</th><th>units</th></tr> </thead> <tbody> <tr> <td>reel storage</td><td>at relative humidity <50%</td><td></td><td></td><td>40</td><td>°C</td></tr> <tr> <td>reflow soldering¹</td><td>see reflow profile</td><td>255</td><td>260</td><td>265</td><td>°C</td></tr> <tr> <td>drying conditions²</td><td>parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours</td><td></td><td></td><td></td><td></td></tr> </tbody> </table> <p>Note:</p> <ol style="list-style-type: none"> 1. Must reflow solder within 72 hours from opening vacuum packaging at a temperature >20°C & relative humidity <60%. 2. When exceeding floor life by >72 hours. 			parameter	conditions/description	min	typ	max	units	reel storage	at relative humidity <50%			40	°C	reflow soldering ¹	see reflow profile	255	260	265	°C	drying conditions ²	parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours					SOLDERABILITY <table border="1"> <thead> <tr> <th>parameter</th><th>conditions/description</th><th>min</th><th>typ</th><th>max</th><th>units</th></tr> </thead> <tbody> <tr> <td>reel storage</td><td>10-30°C, <20% humidity</td><td></td><td></td><td></td><td>°C</td></tr> <tr> <td>reflow soldering¹</td><td>see reflow profile</td><td>255</td><td>260</td><td></td><td>°C</td></tr> <tr> <td>drying conditions²</td><td>parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours</td><td></td><td></td><td></td><td></td></tr> </tbody> </table> <p>Note:</p> <ol style="list-style-type: none"> 1. CUI Devices recommends to solder within 72 hours from opening vacuum packaging at a temperature >10°C & relative humidity <60%. 2. When exceeding floor life by >400 hours.  <p>* Time 25°C to Peak Temp. ----- 5 Minutes Max. * Time within 5°C of Actual Peak Temp. --- 10-40 Seconds</p>			parameter	conditions/description	min	typ	max	units	reel storage	10-30°C, <20% humidity				°C	reflow soldering ¹	see reflow profile	255	260		°C	drying conditions ²	parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours				
parameter	conditions/description	min	typ	max	units																																																
reel storage	at relative humidity <50%			40	°C																																																
reflow soldering ¹	see reflow profile	255	260	265	°C																																																
drying conditions ²	parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours																																																				
parameter	conditions/description	min	typ	max	units																																																
reel storage	10-30°C, <20% humidity				°C																																																
reflow soldering ¹	see reflow profile	255	260		°C																																																
drying conditions ²	parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours																																																				

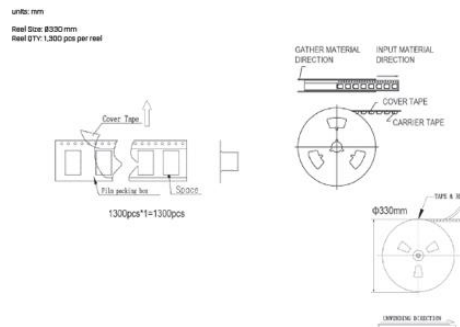

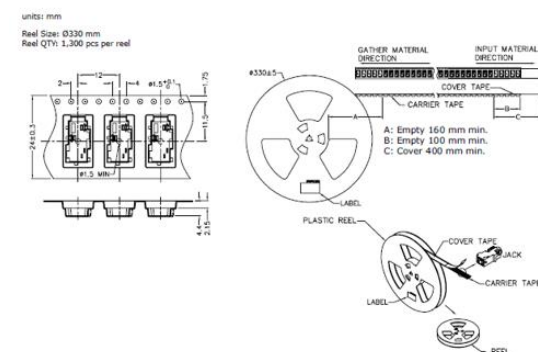

Affected Date Code: *04/24/2023*

Product Availability: *Pertaining to market availability*

PCN Approval:

Operations/Quality

A handwritten signature in black ink, appearing to read "Rae O'Brien", is written over a horizontal line.

Product Management

A handwritten signature in black ink, appearing to read "J. Chadsen", is written over a horizontal line.