

## Product Change Notice (PCN)

Date: **04/18/2024**

PCN Number: **PCN-0455128R-01**

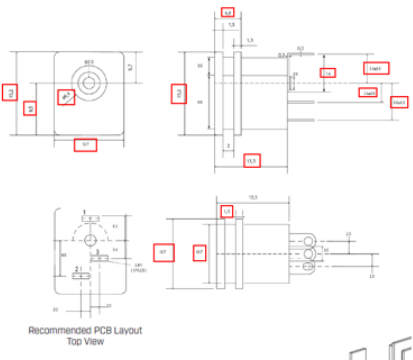
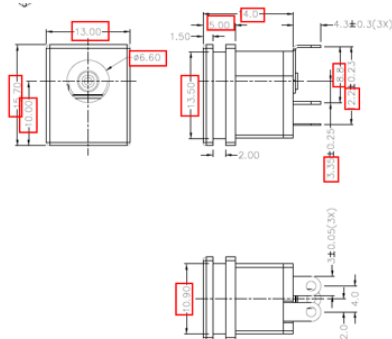
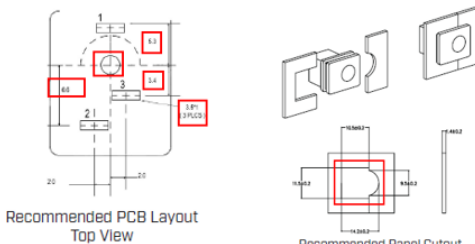
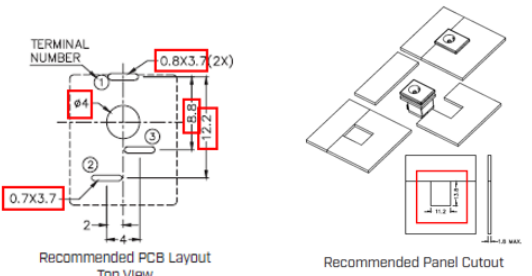
To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: **PJ-009AH**

Reason(s) for Change: **Manufacturing Improvement processes**

Description of Change: **Product re-engineered for improved manufacturability and production yield. See image below for product changes and refer to the updated drawing online. Cosmetic differences may be visible and not affect the form fit and function of the product.**

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE
 <p>Recommended PCB Layout Top View</p>	
 <p>Recommended PCB Layout Top View</p> <p>Recommended Panel Cutout</p>	 <p>TERMINAL NUMBER</p> <p>Recommended PCB Layout Top View</p> <p>Recommended Panel Cutout</p>

F-723-001

Revision: A

PREVIOUS CUI DEVICES DETAIL / IMAGE

DESCRIPTION	MATERIAL	PLATING/COLOR
center pin	brass	nickel
terminal 1	brass	tin
terminal 2	copper alloy	tin
terminal 3	brass	tin
housing	PBT (UL94V-0)	black

MATING PLUG  
Jack Insertion Depth: 9.5 mm

NEW CUI DEVICES DETAIL / IMAGE

DESCRIPTION	MATERIAL	PLATING/COLOR
center pin	brass	nickel
terminal 1	brass	tin over nickel
terminal 2	copper alloy	tin over nickel
terminal 3	brass	tin over nickel
housing	PBT (UL94V-0)	black

MATING PLUG  
Jack Insertion Depth: 9.6 mm

PREVIOUS CUI DEVICE'S DETAIL / IMAGE

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated input voltage			24		Vdc
rated input current				5.0	A
contact resistance	between terminal and mating plug between terminal in a closed circuit			50 30	mΩ mΩ
insulation resistance	at 500 Vdc	100			MΩ
voltage withstand	for 1 minute			500	Vdc
insertion/withdrawal force		0.5		2	kg
operating temperature		-25		85	°C
life			5,000		cycles
flammability rating	UL94V-0				
RoHS	yes				

NEW CUI DEVICE'S DETAIL / IMAGE

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated input voltage			24		Vdc
rated input current				5.0	A
contact resistance	between terminal and mating plug between terminal in a closed circuit			50 30	mΩ mΩ
insulation resistance	at 500 Vdc	100			MΩ
voltage withstand	for 1 minute			500	Vdc
insertion/withdrawal force		0.3		3	kg
operating temperature		-25		85	°C
life			5,000		cycles
flammability rating	UL94V-0				
RoHS	yes				



Affected Date Code: All orders placed after **04/10/2024**

Product Availability: *Pertaining to market availability*

PCN Approval:

Operations/Quality

A handwritten signature in black ink, appearing to read "Robert Griffin", is written over a horizontal line.

Product Management

A handwritten signature in black ink, appearing to read "J. Chadsen", is written over a horizontal line.