

Product Change Notice (PCN)

Date: 07/2/2024

PCN Number: PCN-0456183R-01

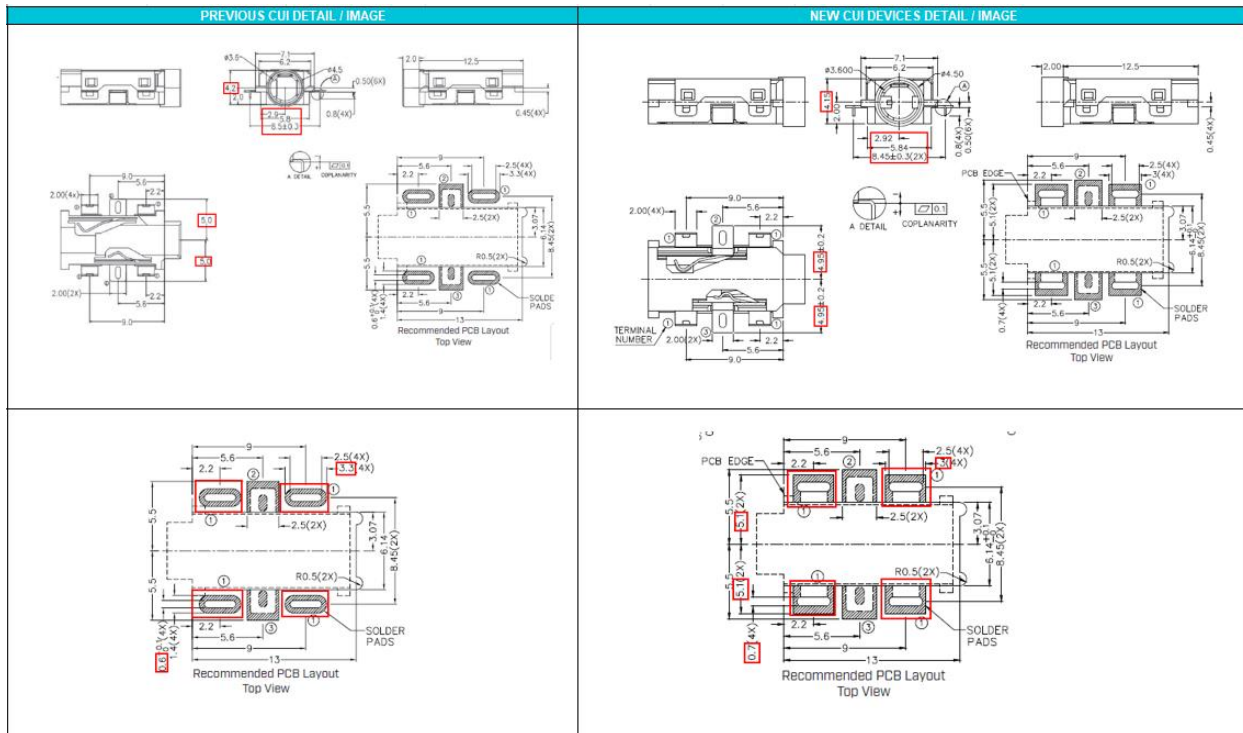
To Our Customers:



We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

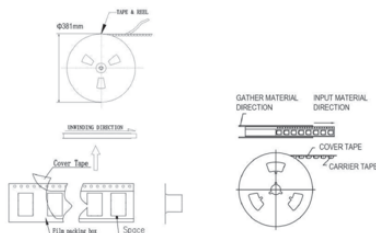
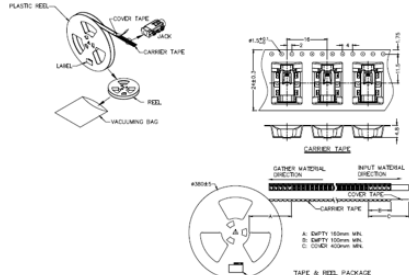
Product(s) Affected: *SJ-3502-SMT-TR*

Reason(s) for Change: *Manufacturing Improvement processes*

Description of Change: *New Factory Location. Product re-engineered for improved manufacturability and production yield. See image below for reference and check CUI Devices website for updated drawing. Cosmetic differences may be visible and not affect the form fit and function of the product.*



PREVIOUS CUI DETAIL / IMAGE				NEW CUI DEVICES DETAIL / IMAGE																																																					
<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>terminal 1</td> <td>stainless steel</td> <td>silver</td> <td colspan="2"></td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>silver</td> <td colspan="2"></td> </tr> <tr> <td>terminal 3</td> <td>copper alloy</td> <td>silver</td> <td colspan="2"></td> </tr> <tr> <td>housing</td> <td>PA8T (UL94V-D)</td> <td>black</td> <td colspan="2"></td> </tr> </tbody> </table>				DESCRIPTION	MATERIAL	PLATING/COLOR			terminal 1	stainless steel	silver			terminal 2	copper alloy	silver			terminal 3	copper alloy	silver			housing	PA8T (UL94V-D)	black			<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>terminal 1</td> <td>stainless steel</td> <td>silver over nickel</td> <td colspan="2"></td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>silver over nickel</td> <td colspan="2"></td> </tr> <tr> <td>terminal 3</td> <td>copper alloy</td> <td>silver over nickel</td> <td colspan="2"></td> </tr> <tr> <td>housing</td> <td>PA10T (UL94V-D)</td> <td>black</td> <td colspan="2"></td> </tr> </tbody> </table>				DESCRIPTION	MATERIAL	PLATING/COLOR			terminal 1	stainless steel	silver over nickel			terminal 2	copper alloy	silver over nickel			terminal 3	copper alloy	silver over nickel			housing	PA10T (UL94V-D)	black		
DESCRIPTION	MATERIAL	PLATING/COLOR																																																							
terminal 1	stainless steel	silver																																																							
terminal 2	copper alloy	silver																																																							
terminal 3	copper alloy	silver																																																							
housing	PA8T (UL94V-D)	black																																																							
DESCRIPTION	MATERIAL	PLATING/COLOR																																																							
terminal 1	stainless steel	silver over nickel																																																							
terminal 2	copper alloy	silver over nickel																																																							
terminal 3	copper alloy	silver over nickel																																																							
housing	PA10T (UL94V-D)	black																																																							
<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>reed storage</td> <td>10-30°C, <10% humidity</td> <td></td> <td></td> <td></td> <td>°C</td> </tr> <tr> <td>reflow soldering¹</td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td></td> <td>°C</td> </tr> <tr> <td>drying conditions²</td> <td>parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Note: 1. CUI Devices recommends to solder within 72 hours from opening vacuum packaging at a temperature <30°C & relative humidity <65%. 2. When exceeding floor life by >100 hours.</p> 				parameter	conditions/description	min	typ	max	units	reed storage	10-30°C, <10% humidity				°C	reflow soldering ¹	see reflow profile	255	260		°C	drying conditions ²	parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours					<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>reed storage</td> <td>at relative humidity <60%</td> <td></td> <td></td> <td>40</td> <td>°C</td> </tr> <tr> <td>reflow soldering¹</td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td>265</td> <td>°C</td> </tr> <tr> <td>drying conditions²</td> <td>parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Note: 1. It is recommended to reflow solder within 72 hours from opening vacuum packaging at a temperature <30°C & relative humidity <65%. 2. When exceeding floor life by >70 hours.</p> 				parameter	conditions/description	min	typ	max	units	reed storage	at relative humidity <60%			40	°C	reflow soldering ¹	see reflow profile	255	260	265	°C	drying conditions ²	parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours						
parameter	conditions/description	min	typ	max	units																																																				
reed storage	10-30°C, <10% humidity				°C																																																				
reflow soldering ¹	see reflow profile	255	260		°C																																																				
drying conditions ²	parts in reel: bake at 110°C for 4 hours parts removed from reel: bake at 110°C for 4 hours																																																								
parameter	conditions/description	min	typ	max	units																																																				
reed storage	at relative humidity <60%			40	°C																																																				
reflow soldering ¹	see reflow profile	255	260	265	°C																																																				
drying conditions ²	parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours																																																								

PREVIOUS CUI DETAIL / IMAGE		NEW CUI DEVICES DETAIL / IMAGE	
<p>PACKAGING</p> <p>units: mm Reel Size: Ø330 mm Reel QTY: 1,000 parts per reel</p> 		<p>PACKAGING</p> <p>units: mm Reel Size: Ø300 mm Reel QTY: 1,000 parts per reel</p> 	

Affected Date Code: All orders placed before **08/30/2024** will be pre-PCN parts. Orders placed after **08/30/2024** will be manufactured in accordance with the PCN. Please check updated 2D drawing on or after **08/30/2024**.

PCN Approval:

Operations/Quality



Product Management

