

**MODEL:** CUSA-T75-18-2400-TH | **DESCRIPTION:** ULTRASONIC SENSOR**FEATURES**


- aluminium can
- open type
- transmitter
- SPL 110 dB
- detectable range 15 meters

**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
type	transmitter				
operating voltage	at 40 kHz			80	Vp-p
frequency			40		kHz
sound pressure level	at 10 V, 30 cm, sine wave	110			dB
directivity			75		degree
capacitance	at 1 kHz	1,800	2,400	3,000	pF
detectable range		0.2		18	m
dimensions	Ø12.5 x 9.5				mm
material	aluminum				
terminal	pins (iron with tin plating)				
weight			1.58		g
operating temperature		-30		85	°C
RoHS	yes				



**SOLDERABILITY**

parameter	conditions/description	min	typ	max	units
wave soldering				250	°C

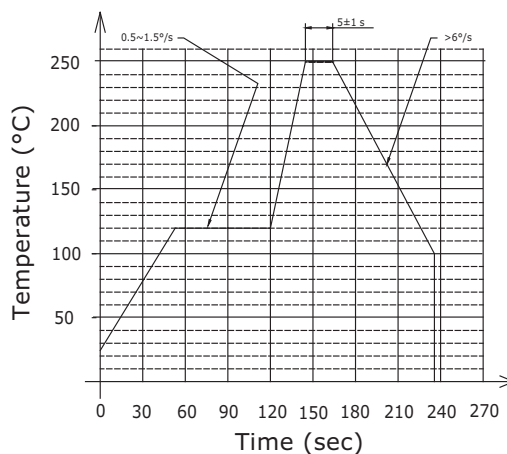

## MECHANICAL DRAWING


units: mm

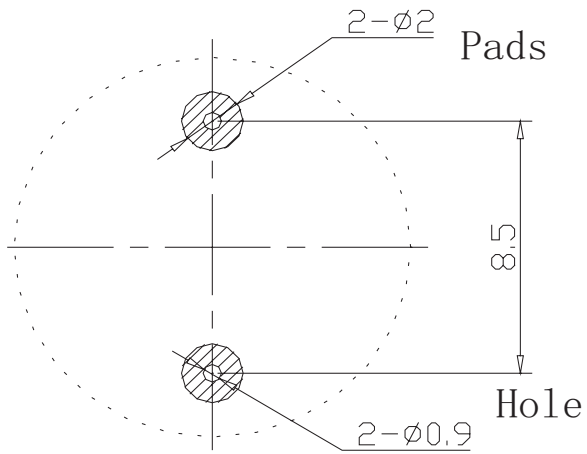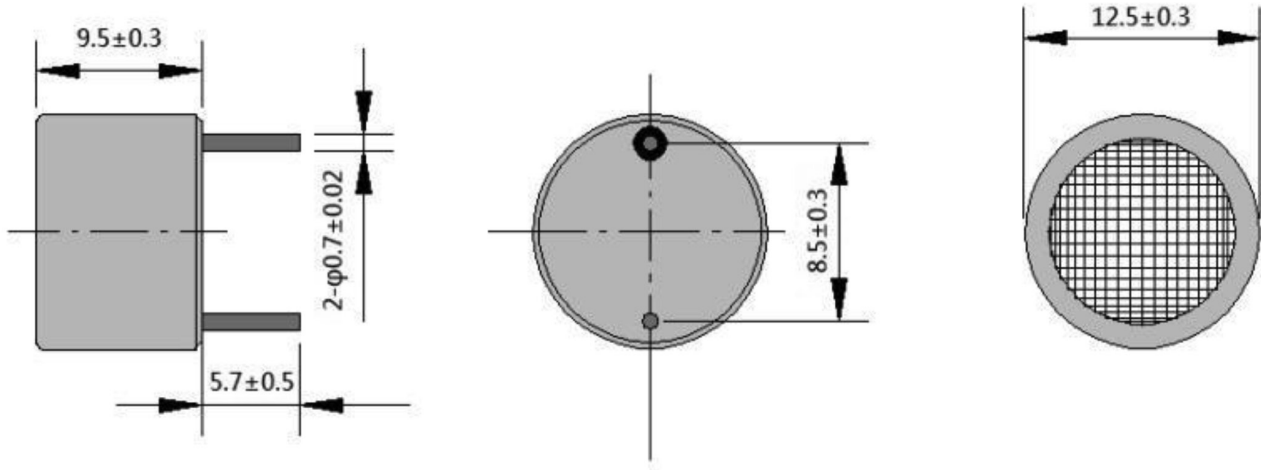


Recommended PCB Layout  
Top View

## BEAM PATTERNS

SPL vs. Frequency

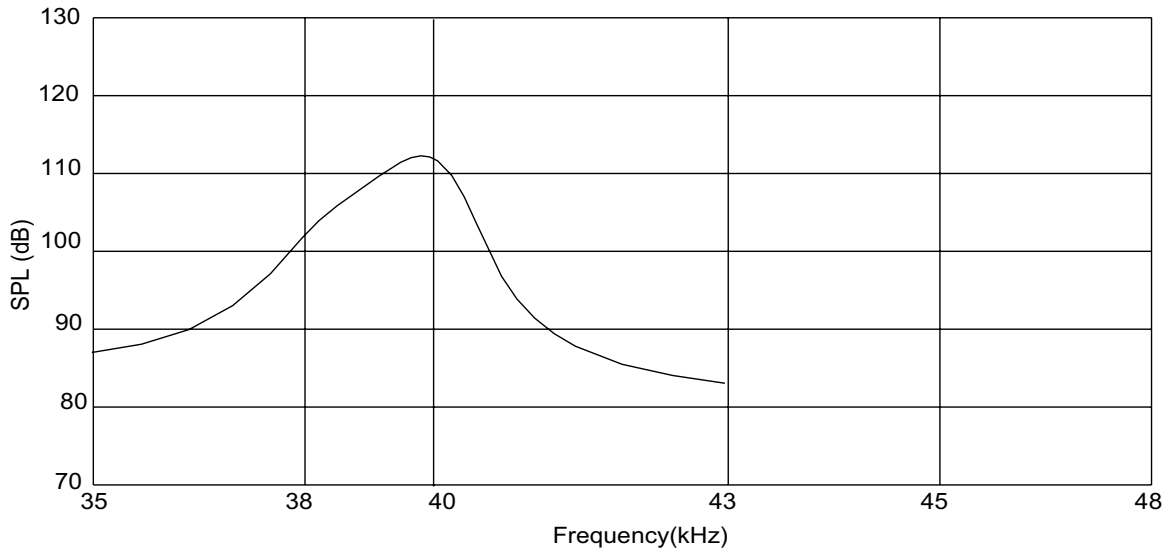

Directivity

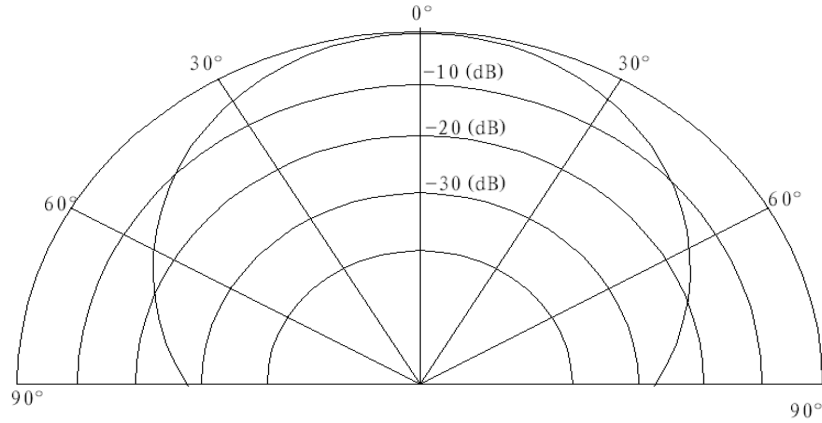

## PACKAGING


units: mm

Tray Size: 230 x 135 x 35 mm


Tray QTY: 100 pcs per tray

Carton Size: 490 x 350 x 270 mm


Carton QTY: 4,000 pcs per carton

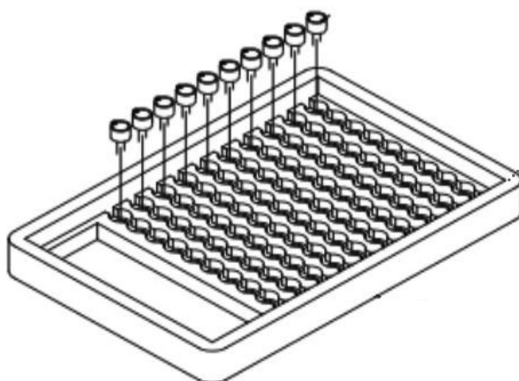

100PCS/BOX  
BOX SIZE:23\*13.5\*3.5CM

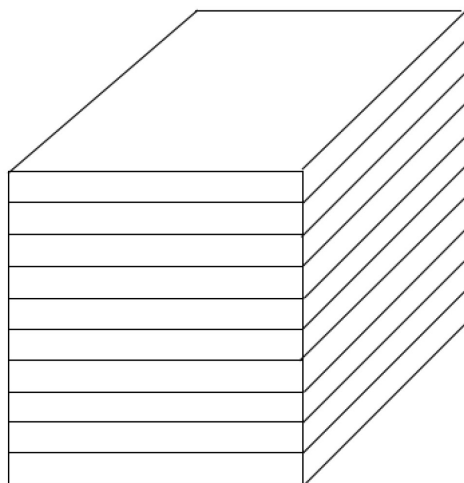

10BOXES/STACK, TOTAL 1000PCS  
STACK SIZE:23\*13.5\*28CM

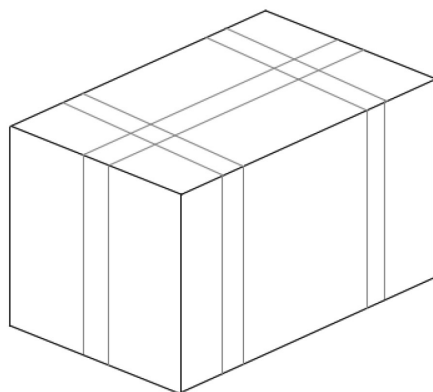

4000PCS/CARTON  
CARTON SIZE:49\*35\*27CM

## REVISION HISTORY

---

rev.	description	date
1.0	initial release	12/02/2020

The revision history provided is for informational purposes only and is believed to be accurate.

---

# CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.