

SERIES: CDM1207 | DESCRIPTION: M12 CONNECTOR

FEATURES

- M12 female connector
- A code
- panel mount
- IP67





SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
	3 & 4 pole models			250	V
rated voltage	5 pole model			60	V
	8 & 12 pole models			30	V
	3, 4, & 5 pole models			4	А
rated current	8 pole model			2	A
	12 pole model			1.5	А
withstanding voltage for 1 minute			1,500		Vac
contact resistance				10	mΩ
insulation resistance	at 500 Vdc for 1 minute	100			MΩ
insertion/withdrawal force		0.3		3.0	kgf
operating temperature		-25		80	°C
life		100			cycles
afety approvals compliant with IEC61076-2-101					
flammability rating	see material table				
RoHS	yes				
IP level	IP67 (in mated condition)				
	tray QTY: 30 pcs				
packaging	carton size: 275 x 235 x 335 mm				
	carton QTY: 450 pcs				

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 3 seconds	260	280	300	°C

PART NUMBER KEY

.....

<u>CDM1207</u> - <u>XX</u> A - FP - R16 - 67

Base Number

No. of Poles (A-Coding):

- 03 = 3
- 04 = 4 05 = 5

08 = 8


12 = 12

cuidevices.com


MECHANICAL DRAWING

units: mm tolerance: 0.5<X≤6.0: ±0.1 mm 6.0<X≤30.0: ±0.2 mm unless otherwise noted

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
А	M12x1.0 screw	brass	nickel
В	terminals; female	brass	gold
С	housing; female	PA66 (UL94V-0)	black
D	o-ring	FKM	black
E	resin	epoxy resin	black
F	o-ring	FKM	green
G	M16x1.5 nut	brass	nickel

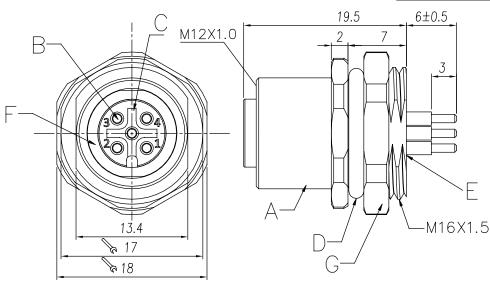

.....



Recommended Panel Cutout

.....

No. of Poles	3	4	5	8	12
A-Coding		30 04 20 01	30 04 05 20 01		
Pin Diameter	1.0 mm	1.0 mm	1.0 mm	0.8 mm	0.6 mm
Recommended PCB Layout Top View	#50 3 4 01.2x3 (51) 0 1	4 50 3 4 81214 51 0 0 1	4 01205 5 0 0 5 0 0 5 0 0 1 0 1	4 05 866 30 007 #5.5 1316 35 15 15 15	45.8 40 5.8 40 5.8 40 5.8 40 5.8 5.8 40 5.8 5.8 5.8 5.8 5.8 5.8 5.8 5.8 5.8 5.8

REVISION HISTORY

rev.	description	date	
1.0	initial release	12/13/2021	
1.01	logo, datasheet style update	08/05/2022	

The revision history provided is for informational purposes only and is believed to be accurate.

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.



CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.