


SERIES: PR12 | **DESCRIPTION:** POWER RELAY**FEATURES**

- 5V/12V/24V
- SPST & SPDT
- 360 mW

**MODEL**

| | coil voltage | coil resistance | operating voltage | release voltage | coil power |
|-----------------|---------------------|---------------------------------------|--------------------------|------------------------|--------------------|
| | typ (Vdc) | ($\Omega \pm 10\%$) | min (Vdc) | max (Vdc) | max (mW) |
| PR12-5V-360-1A | 5 | 70 | 3.5 | 0.5 | 360 |
| PR12-12V-360-1A | 12 | 400 | 8.4 | 1.2 | 360 |
| PR12-24V-360-1A | 24 | 1,600 | 16.8 | 2.4 | 360 |
| PR12-5V-360-1C | 5 | 70 | 3.5 | 0.5 | 360 |
| PR12-12V-360-1C | 12 | 400 | 8.4 | 1.2 | 360 |
| PR12-24V-360-1C | 24 | 1,600 | 16.8 | 2.4 | 360 |

Notes: 1. All specifications are measured at 23°C unless otherwise specified.

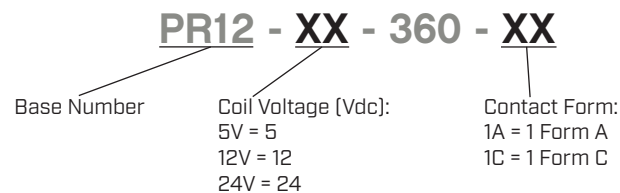PART NUMBER KEY

CONTACT SPECIFICATIONS


| parameter | conditions/description | min | typ | max | units |
|-----------------------|--|-----|-----------------------|--------------|--------------------------|
| contact form | 1 Form A, 1 Form C | | | | |
| contact material | Ag alloy | | | | |
| contact rating | 1 Form A: 10 A @ 250 Vac 1 Form C: NO/NC: 10 A / 6 A @ 250 Vac, 10 A / 6 A @ 24 Vdc | | | | |
| contact resistance | at 6 Vdc, 1.0 A | | | 100 | mΩ |
| max switching voltage | | | | 250 28 | Vac Vdc |
| max switching current | | | | 15 | A |
| max switching power | | | | 2,500 280 | VA W |
| min switching load | 5 Vdc, 100 mA | | | | |
| life | electrical mechanical | | 100,000 10,000,000 | | operations operations |

GENERAL SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|-----------------------|---|-------|--------------|-----|--------------------------------------|
| insulation resistance | at 500 Vdc | 1,000 | | | MΩ |
| dielectric strength | between open contacts for 1 minute between coil and contacts for 1 minute | | 750 1,500 | | Vac Vac |
| operate time | | | | 10 | ms |
| release time | | | | 5 | ms |
| shock resistance | endurance misoperation | | 1,000 100 | | m/s ² m/s ² |
| vibration resistance | endurance: 10~55 Hz, 1.5 mm double amplitude misoperation: 10~55 Hz, 1.5 mm double amplitude | | | | |
| operating temperature | | -40 | | 85 | °C |
| humidity | at 40°C | 35 | | 95 | %RH |
| weight | | | 10.0 | | g |
| safety approvals | UL/cUL 508 | | | | |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |
| packaging | box: 250 pcs per box carton size: 323 x 221 x 280 mm carton QTY: 1,000 pcs per carton | | | | |

SOLDERABILITY

| parameter | conditions/description | min | typ | max | units |
|----------------|------------------------|-----|-----|-----|-------|
| hand soldering | for 3.5±0.5 seconds | 340 | 350 | 360 | °C |
| wave soldering | for 10±1 seconds | 255 | 260 | 265 | °C |



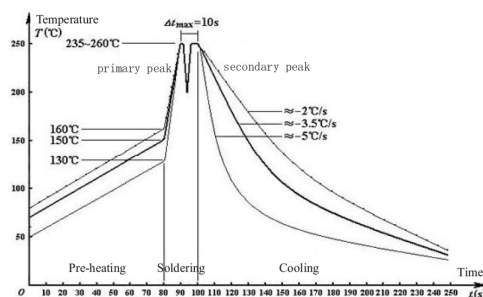


Double-wave Soldering Curve


MECHANICAL DRAWING (1A = 1 FORM A)

units: mm
 tolerance: ± 0.3 mm
 unless otherwise noted

| ITEM | DESCRIPTION | MATERIAL | PLATING/COLOR |
|------|-------------|----------------------|---------------|
| A | housing | PBT [UL94V-0] | black |
| B | terminals | copper covered steel | tin |

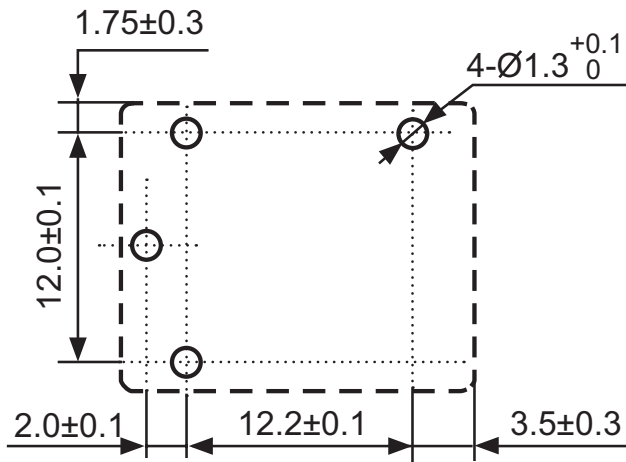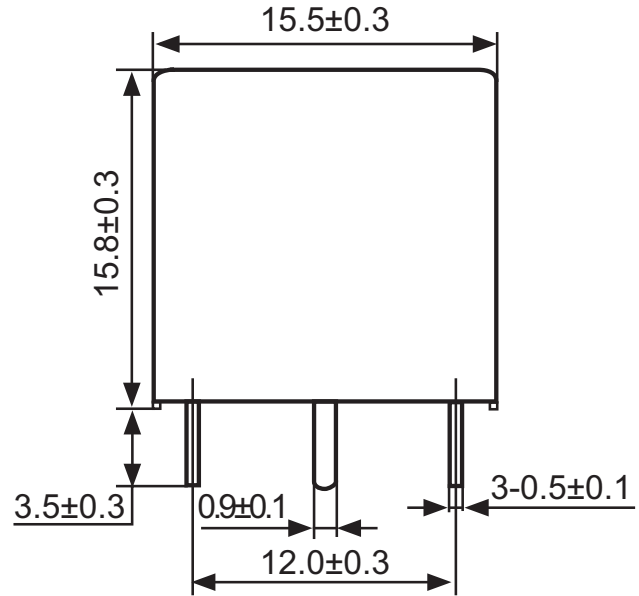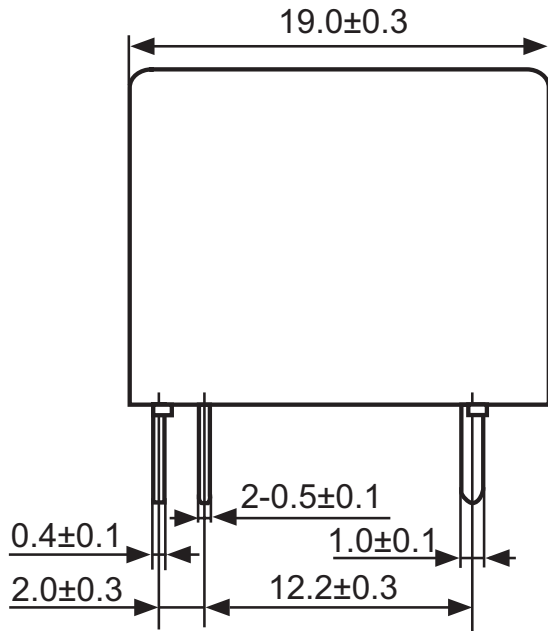

Recommended PCB Layout
 Bottom View






Wiring Diagram
 Bottom View


MECHANICAL DRAWING (1C = 1 FORM C)

units: mm
 tolerance: ± 0.3 mm
 unless otherwise noted

| ITEM | DESCRIPTION | MATERIAL | PLATING/COLOR |
|------|-------------|----------------------|---------------|
| A | housing | PBT [UL94V-0] | black |
| B | terminals | copper covered steel | tin |

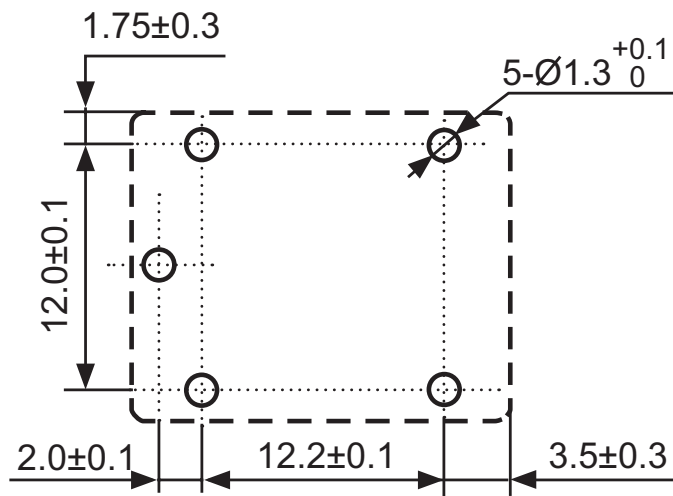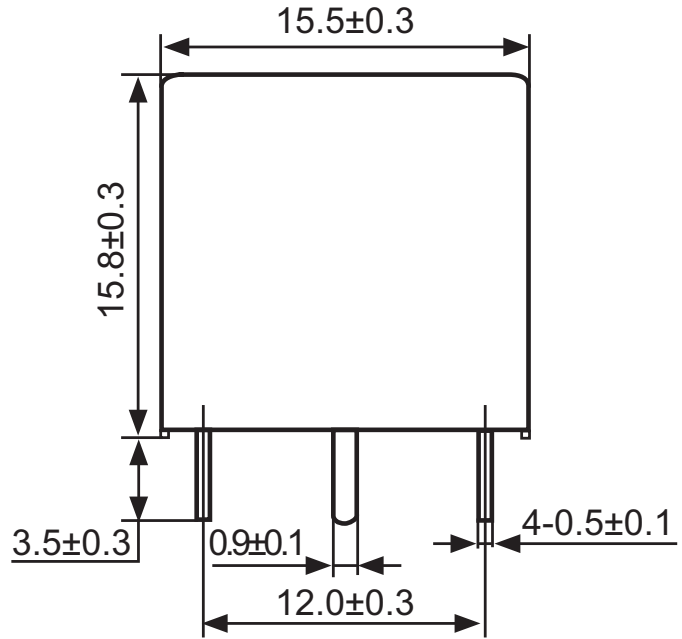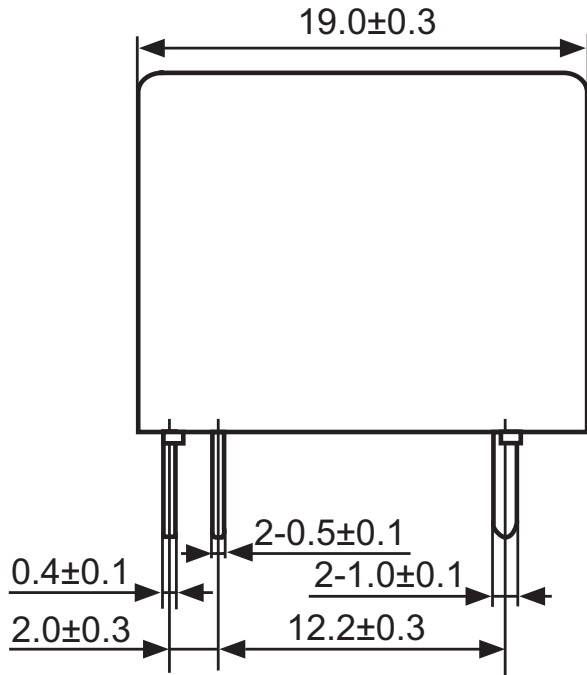


Recommended PCB Layout
 Bottom View

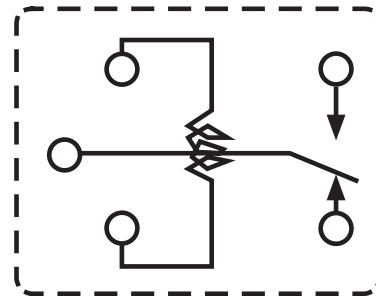


Wiring Diagram
 Bottom View

CHARACTERISTIC CURVES


Time Curve

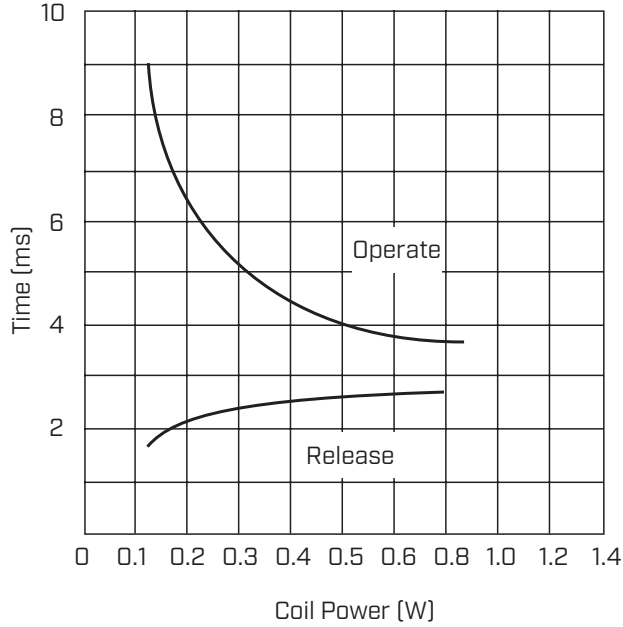


Coil Temperature Rise

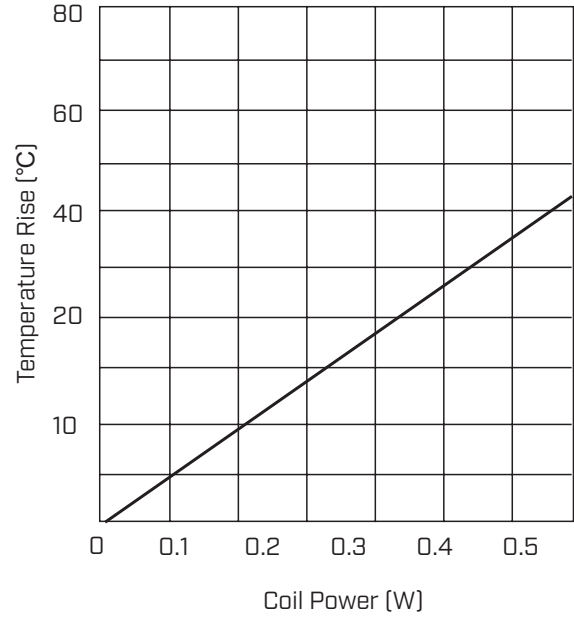

Life Curve

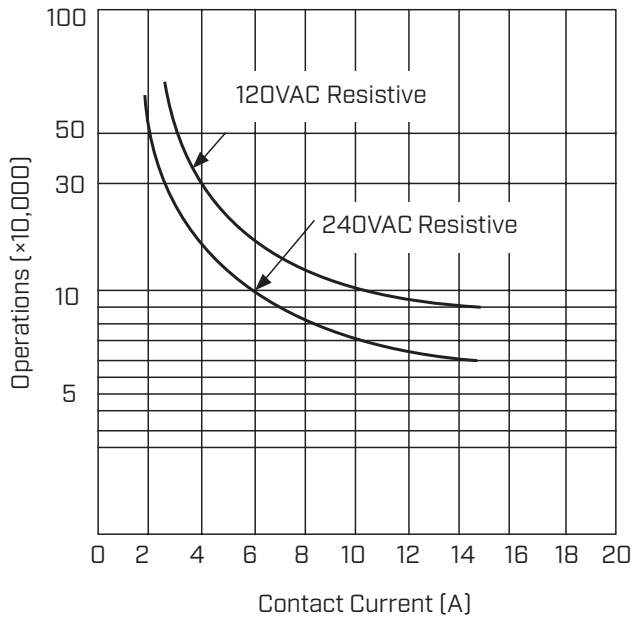

Maximum Switching Power

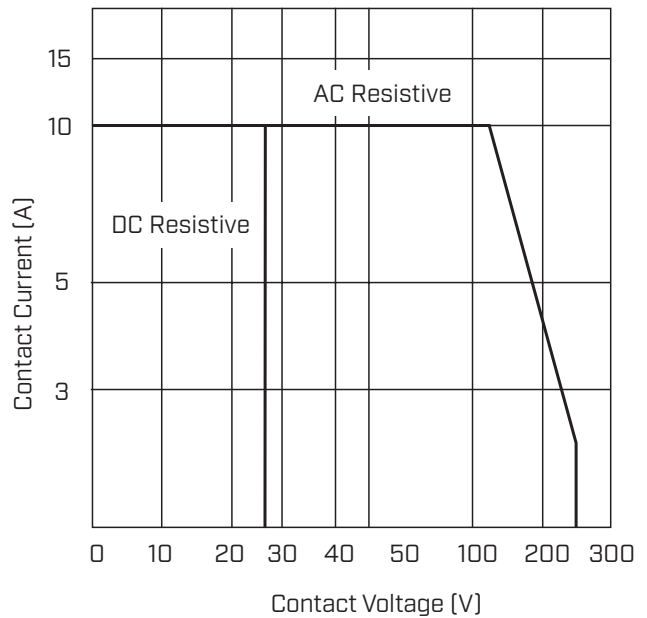

REVISION HISTORY

| rev. | description | date |
|------|-----------------|------------|
| 1.0 | initial release | 08/08/2022 |

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

cuidevices.com